

1

2



3

4

## Notes

1. Leak test to 5x10E-10 Standard cc/sec of He
2. Environmental rating is limited to that of ISO NW flange... 1x10E-8 Torr, and 150C
3. Axial load is 5 lb. maximum... Lateral (moment) load is 5 lb maximum at 2 inch from flange face.
4. Linear / Rotary scale resolutions are .025 / .001 Inch respectively

Rev	Description	Date
A		

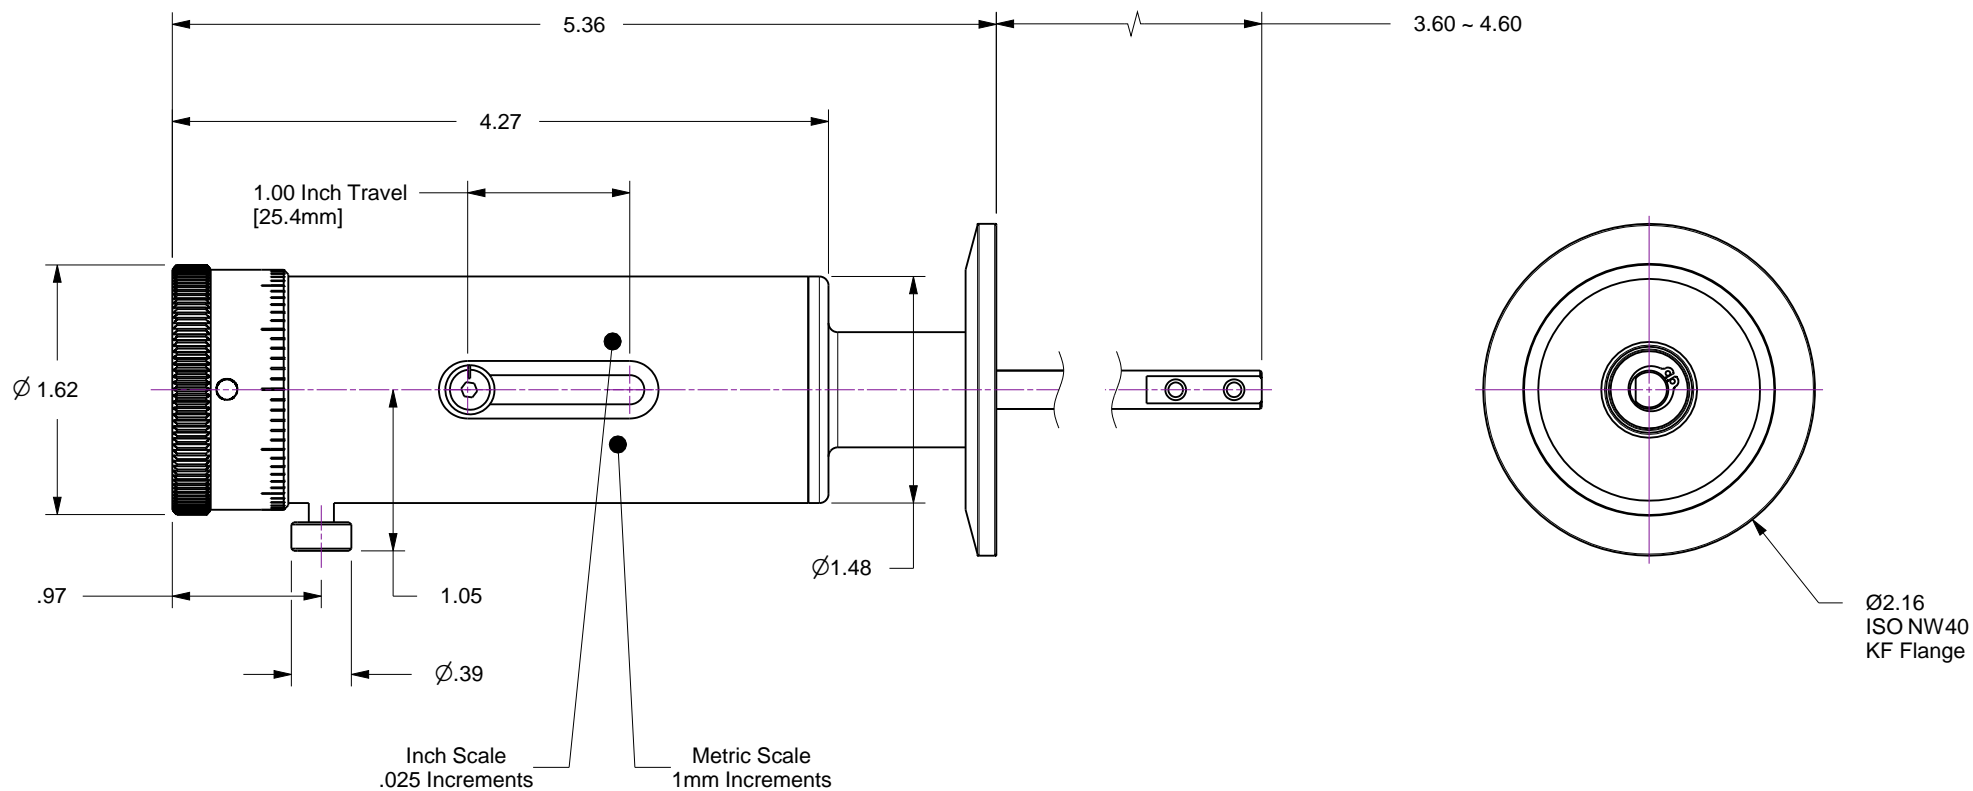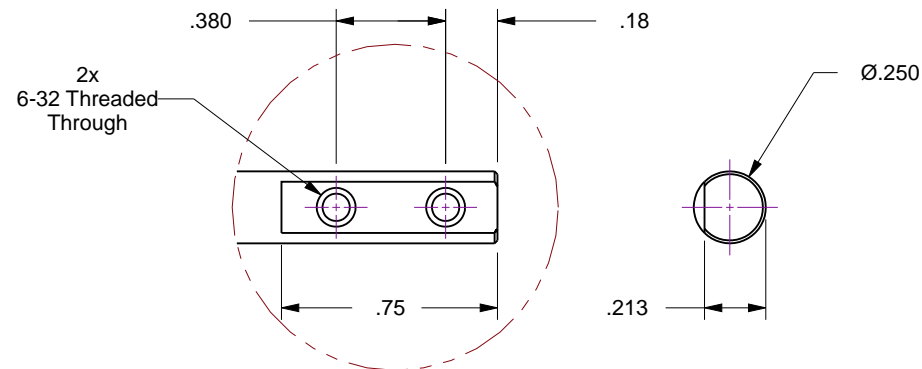

**Accu-Glass Products Inc.**  
25047 Anza Drive  
Valencia, CA 91355  
T 818-365-4215  
F 818-365-7074  
www.accuglassproducts.com

**UNCONTROLLED WEB DRAWING**

Proprietary and Confidential  
The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material

assembly

Tolerances,  
unless otherwise specified

.X ± .030

.XX ± .010

.XXX ± .005

Angles ± 0.5°

Finish 63Ra

Title

1" LINEAR ON NW40 KF

Drawn by  
Date

CR  
6/29/2010

No. **102270**

Rev.

**A**

Approved

Sheet