



**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 ACCU-GLASS PRODUCTS INC. ANY  
 REPRODUCTION IN PART OR AS WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 ACCU-GLASS PRODUCTS INC. IS  
**PROHIBITED.**

Rev	Description	Date	Approved

**Part No. Model No. Coating Type / Optimized Transmission Range**

112905	VPD-UN-K40	Uncoated / 200~2000nm (70~95%)
112906	VPD-UV-K40	UV / 290~370nm >99%
112907	VPD-A-K40	Type-A / 350~700nm >99%
112908	VPD-B-K40	Type-B / 650~1050nm >99%
112909	VPD-C-K40	Type-C / 1050~1620nm >99%

BBAR applied to both optical faces

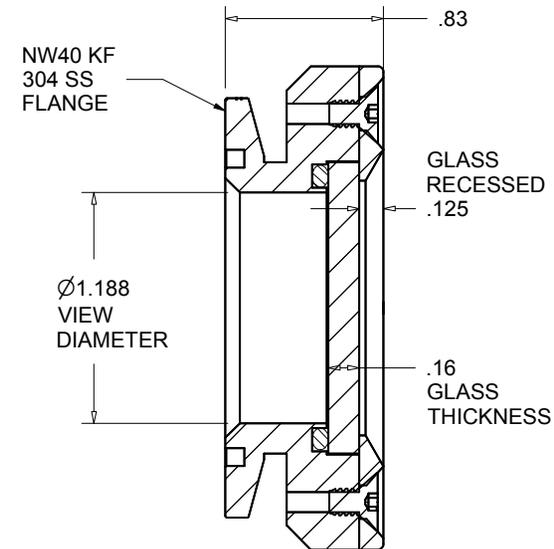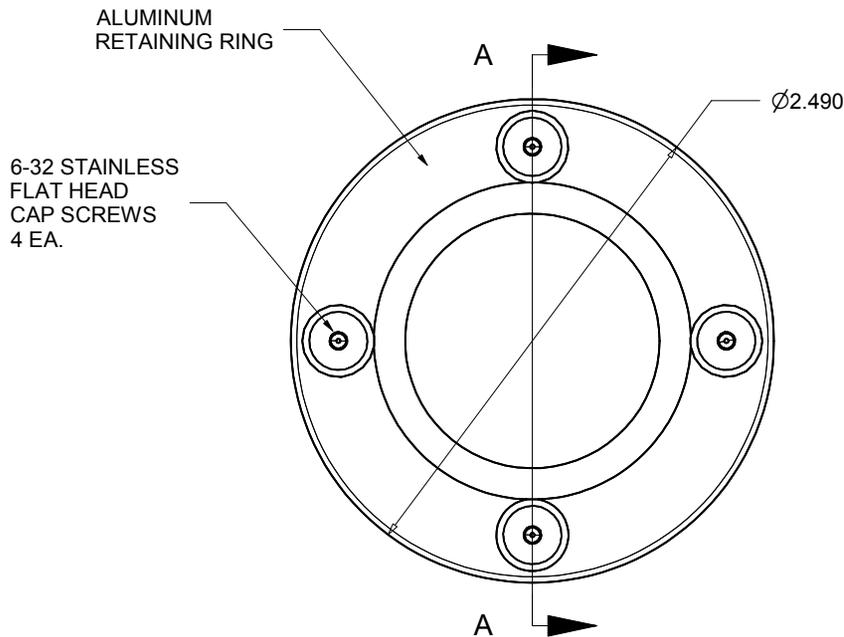

Section A-A



Accu-Glass Products Inc.  
 25047 Anza Drive  
 Valencia, CA 91355  
 P 818-365-4215  
 F 818-365-7074  
 www.accuglassproducts.com

Notes:

**\* UNCONTROLLED WEB COPY\***

Material	
Tolerances unless otherwise specified.	
.X ± .03	Angular: +/- .5°
.XX ± .01	Finish: Min. 63 Ra
.XXX ± .005	

Title:		VPD-XX-K40	
Coated / Demountable Viewports / ISO KF40 Flange			
Drawn By Date	Ligeti 12/12/10	DWG. NO.	112605~609
Approved	AL	Rev.	A
			Sheet 1 OF 1