

1

2



3

4

Notes

1. HTL-K16-2... 2-Inch Linear Travel Feedthrough w/Manual Actuator
2. Welded bellows sealed air-to-vacuum interface
3. Leak test to 5x10E-10 Standard cc/sec of He
4. Maximum Loads : 5lb Axial / 5lb lateral @ 2 inches from flange face
5. Resolution : .001 Rotary scale / .025 inch Linear scale
6. Optional 'Speed-Handle' part number 113086 is available (sold separately)

Rev.	Description	Date	Made By	Approval
B	Remodeled	4/9/2019	AL	

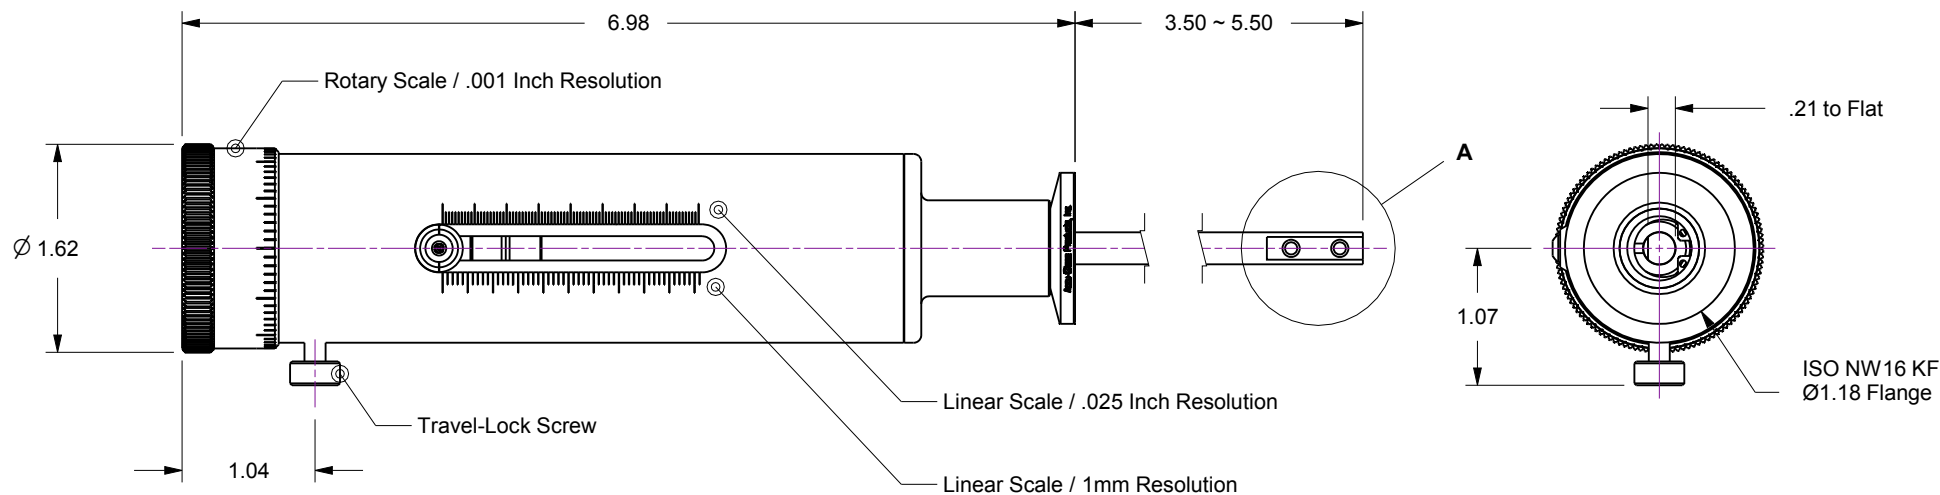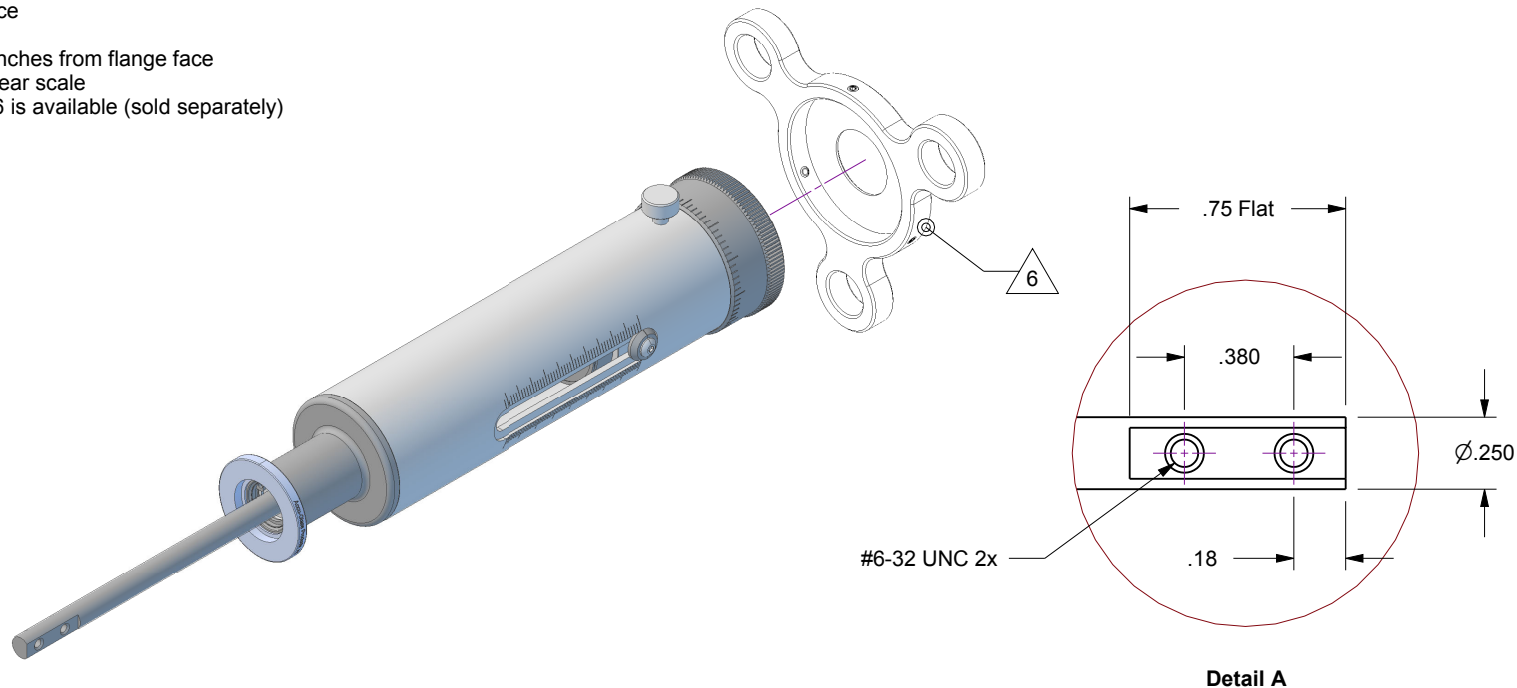

Accu-Glass Products Inc.
 25047 Anza Drive
 Valencia, CA 91355
 T 818-365-4215
 F 818-365-7074
 www.accuglassproducts.com

UNCONTROLLED WEB DRAWING

Proprietary and Confidential
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material
 See Individual Components

Tolerances,
 unless otherwise specified

.X ± .030
 .XX ± .010
 .XXX ± .005

Angles ± 0.5°
 Finish 63Ra

Title

HTL-K16-2

Drawn by
 Date

Ligeti
 4/9/2019

No. **102260**

Rev.

B

Approved

Sheet