
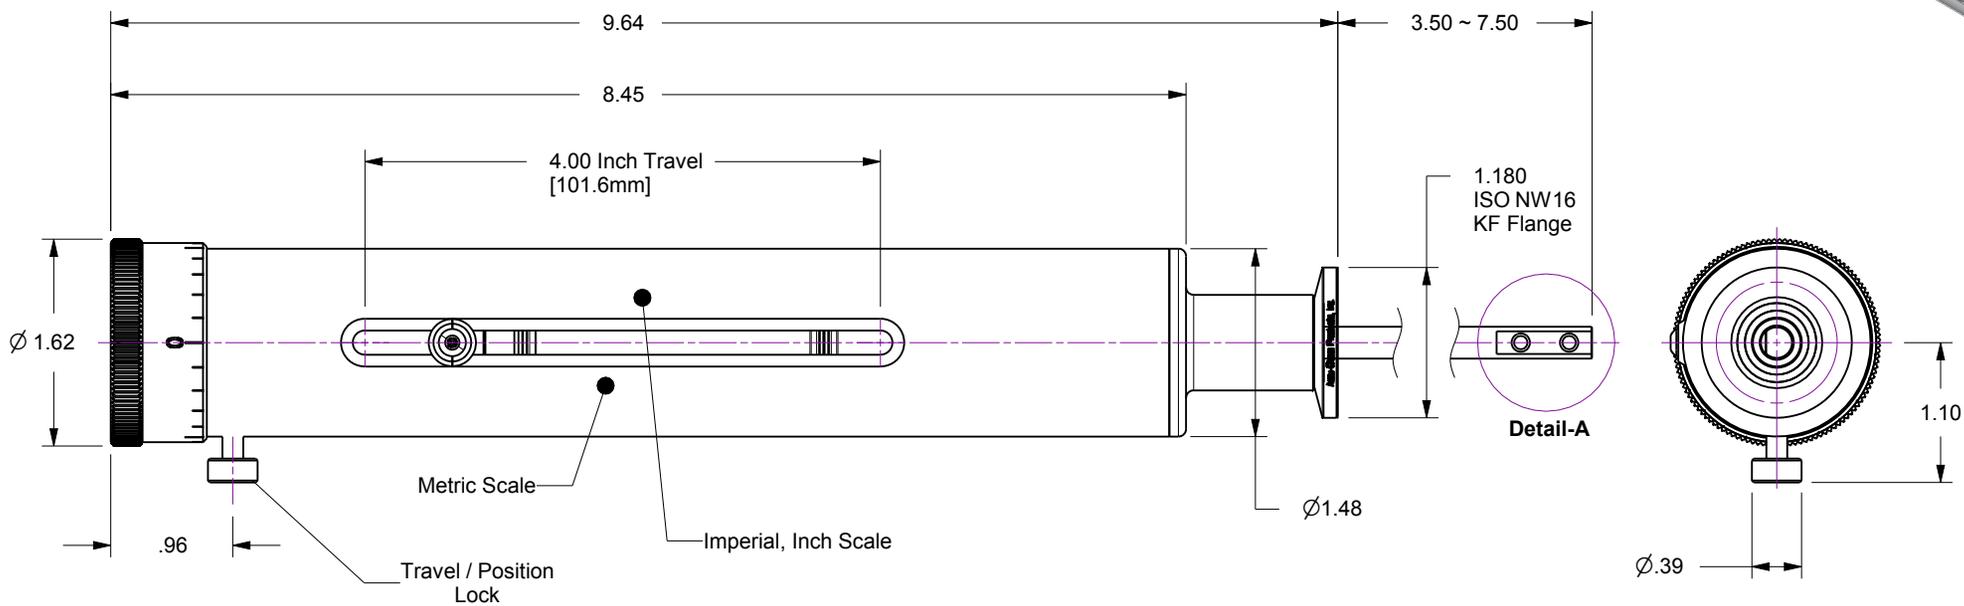
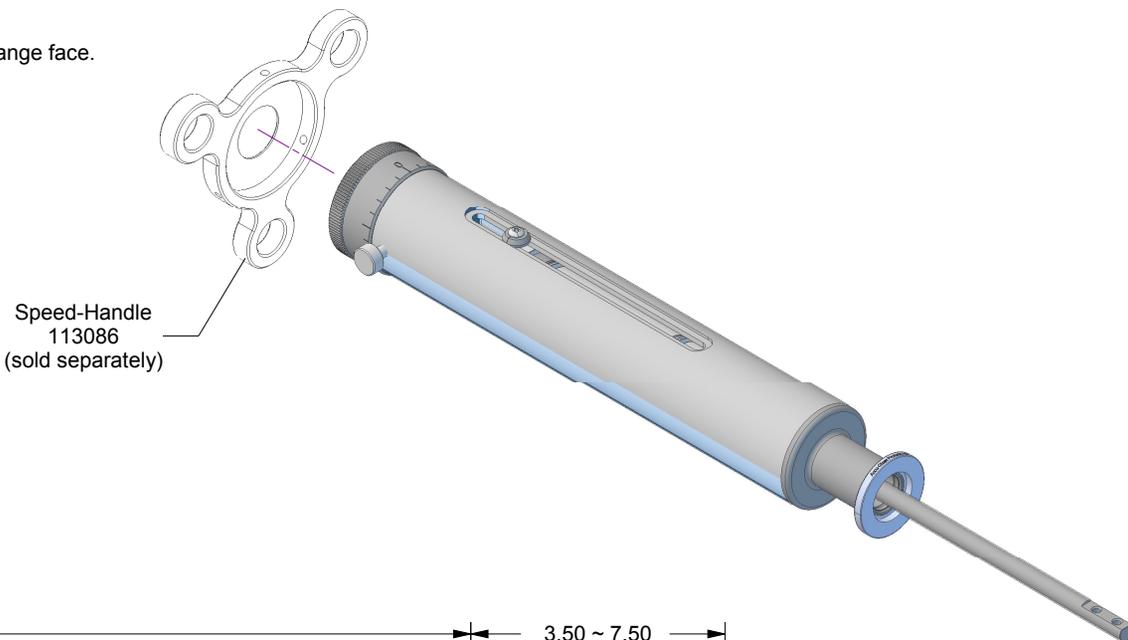


Notes

- 1. Manual, 4-Inch linear travel, UHV (welded bellows) feedthrough on ISO NW16 KF flange
- 2. Optional speed-handle part number 113086 (sold separately) provides faster manual actuation
- 3. Leak test to 5x10E-10 Standard cc/sec of He
- 4. Environmental rating is limited to that of ISO NW flange... 1x10E-8 Torr, and 150C
- 5. Axial load is 5 lb. maximum... Lateral (moment) load is 5 lb maximum at 2 inch from flange face.
- 6. Linear / Rotary scale resolutions are .025 / .001 Inch respectively

Rev	Description	Date
A	Initial Release	

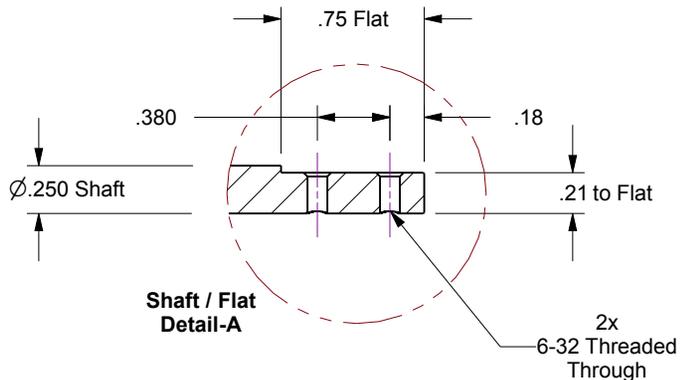

**Accu-Glass Products Inc.**  
 25047 Anza Drive  
 Valencia, CA 91355  
 T 818-365-4215  
 F 818-365-7074  
 www.accuglassproducts.com

**UNCONTROLLED WEB DRAWING**

Proprietary and Confidential  
 The information contained in this drawing is the sole property of Accu-Glass, Products Inc. Any reproduction, in part or as whole, without the written permission of Accu-Glass Products, Inc., is strictly prohibited.

Material See Individual Components	
Tolerances, unless otherwise specified	
.X ± .030	Angles ± 0.5°
.XX ± .010	Finish 63Ra
.XXX ± .005	

Title <b>Linear Motion FT, 4.0" Manual on ISO NW16 KF</b>			
Drawn by Farrell	Date 3/24/2016	No. <b>113080</b>	Rev. <b>A</b>
Approved			Sheet